




BOX TERMINAL
CABLE CONNECTION
SPACE

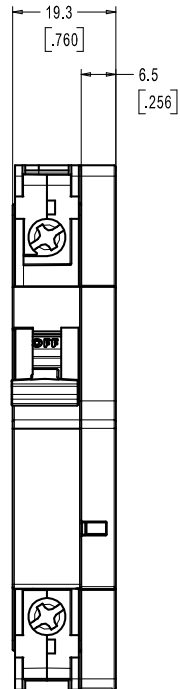

TERMINAL SIZE

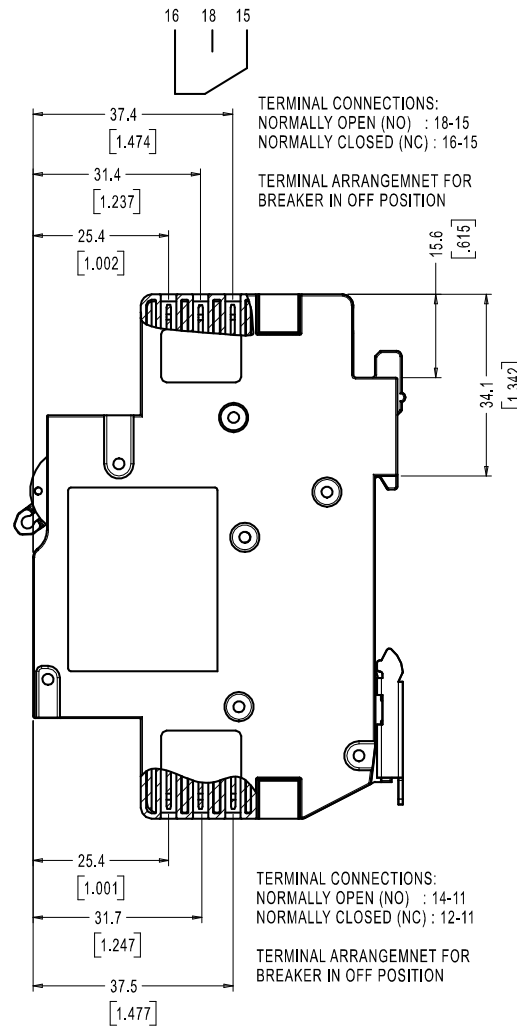

TERMINAL CONNECTIONS:
NORMALLY OPEN (NO) : 18-15
NORMALLY CLOSED (NC) : 16-15

TERMINAL ARRANGEMNET FOR
BREAKER IN OFF POSITION

TERMINAL CONNECTIONS:
NORMALLY OPEN (NO) : 14-11
NORMALLY CLOSED (NC) : 12-11

TERMINAL ARRANGEMNET FOR
BREAKER IN OFF POSITION

TOLERNCES ±0.4 UNLESS OTHERWISE SPECIFIED
(DIMENSIONS IN BRACKETS ARE IN INCH)

ALL INFORMATION CONTAINED IN THIS DOCUMENT IS THE
PROPERTY OF CBI AND IS TO BE TREATED AS CONFIDENTIAL,
DISCLOSURE TO THIRD PARTIES IS NOT PERMITTED.

A		DCN 2004012 FIRST RELEASE	YV
REV	DESCRIPTION	SIGN	
	MATING FACE	-MF	
	PROCESS DIMENSION	-PD	
	INTERSECTION	-INT	
	BEFORE PLATING	-BP	
	ALL DIMENSIONS IN TOLERANCES ON UN-DIMENSIONED 90° FEATURES ARE ±0.5°	-mm	
	TOLERANCES < ±0.1 ARE CRITICAL BRACKETED DIMENSIONS-EXISTING TOOLING		
	SURFACE AREA	mm²	
	VOLUME	mm³	
	MATERIAL		
	RAW MTL No.		
	FINISH		
DRAWN	YV	DATE 30/04/2020	
CHECK	APPD		
TOLERANCES		DO NOT SCALE	
X	±0.5	ORIGINAL SIZE A3	
X.X	±0.1		
X.XX	±0.05		
ANGULAR	±0.5°		
TITLE			
I POLE+AUX/TRIP ALARM			
Y-FRAME			
		DRG. No.	3990A991
		UG	