

**Q-SERIES**  
**QF36-FRAME**  
**EARTH LEAKAGE**



**QF36A**  
Dual (DIN & mini rail) mount

**PRODUCT INTRODUCTION**

The QF36 Series is a high-performance Earth Leakage Circuit Breaker (ELCB) with hydraulic-magnetic technology, ideal for applications requiring reliable protection from electric shock and fire hazards. It features 100% ambient temperature-independent tripping, making it highly effective in extreme conditions ranging from -40°C to +85°C.

**FEATURES**

- Hydraulic-magnetic technology
- 100% rating capability, independent of ambient temperature
- Complies with IEC 60947-2
- Ratings 6 to 32 A
- Earth Leakage sensitivity 30 mA, **Type A**
- Three pole plus switched neutral earth leakage protection
- Precision tripping characteristics
- Trip indication with mid-trip position
- Can be switched on immediately after tripping
- Suitable to use for electrical isolation
- Shell designed for easier installation onto busbar
- 57 mm front escutcheon

**APPLICATIONS**

- Residential and commercial applications requiring high sensitivity earth leakage protection from electrical shock and fire hazards
- Telecom/datacom equipment
- Lighting control
- UPS equipment
- Alternative energy equipment

**APPROVALS**



(EN/IEC 60947-2)

**TECHNICAL DATA**

ELECTRICAL	
Dielectric Strength	1 000 - 2 000 Vac for one minute (IEC 60947-2 Clause 8.3.3.3)*
Time Delay Curves	Curve 2 - medium time delay

MECHANICAL	
Endurance	10 000 operations; 1 500 with current, 8 500 without current (IEC 60947-2 Clause 7.2.4.2)*

ENVIRONMENTAL	
Operating Temperature Range	-40°C to +85°C
Altitude	Certification tests done at altitude ≈ 2 000 metres. Will operate at higher altitudes.
Shock	10 G (IEC 60068-2-27)
Vibration	1.5 G (IEC 60068-2-6) (sinusoidal wave)
Flammability	I3 - Ignition does not persist at 850°C after glow wire is withdrawn with an oxygen index of ≥ 28
Toxicity	F1 - Smoke index of ≤ 20 which determines the fume class
Pollution Degree	PD2 - Normally only non-conductive pollution occurs. Temporary conductivity caused by condensation is to be expected.

PHYSICAL	
Mounting Options	Dual (DIN & mini rail) mount
Number of poles	4 (3+N) - Three pole plus switched neutral earth leakage protection
Weight	570 g per pole (unpacked)
Standard Colours	Shell - black Handle - white and green

Approvals	EN/IEC 60947-2
Product Type	QF36
Number of Poles	3+N
Standard Ampere Ratings	6 A to 32 A
Sensitivity	30 mA
Equipment Type Rated Voltage	415 Vac
Ultimate S/C breaking Capacity (Icu)	6 kA

Earth Leakage	Wire Size (IEC)	Torque (IEC)	Comments
Main Terminal	0.75 mm <sup>2</sup> - 35 mm <sup>2</sup>	2.5 Nm	Pozidriv #2 Combi head

**LONG CODE**

**Example Code: Q-F-36-A--DM-2-32A-30mA-415V----**


Group	1	2	3	4	5	6	7	8	9	10	11	12	13
<b>Requirement</b>	Q frame	Type F	1 + pole+N	Overload	No Auxiliary or additional pole	Dual Mount	Medium delay curve 2	Current rating 32 A	Sensitivi- ty 30 mA	Voltage 415 Vac	Future use	Future use	Future use
<b>Long Code</b>	<b>Q</b>	<b>F</b>	<b>36</b>	<b>A</b>	<b>-</b>	<b>DM</b>	<b>2</b>	<b>32 A</b>	<b>30 mA</b>	<b>415 V</b>	<b>-</b>	<b>-</b>	<b>-</b>

**ORDERING INFORMATION**

Group 1: Frame Type	Code	Description	Comments
	Q	Earth leakage	
Group 2: Product Type	Code	Description	Comments
	F	415 Vac	
Group 3: No of Poles	Code	Description	Comments
	36	Three pole plus switched neutral (3+N)	36 mm wide
Group 4: E-L Type	Code	Description	Comments
	A	Overload	White and green handle
Group 5: Auxiliary / Additional Pole	Code	Description	Comments
	-	Not applicable	
Group 6: Mounting	Code	Description	Comments
	DM	Dual (DIN & mini rail) mount	Dual mount supplied in black shell only - 57 mm escutcheon
Group 7: Time Delays	Code	Description	Instantaneous Trip Point (x In)      Comments
	2	Medium time delay	5 – 10
Group 8: Current Ratings	Code	Description	Comments
		6 - 32 A	
Group 9: Sensitivity	Code	Description	Comments
	30 mA	30 mA	Standard
Group 10: Voltage	Code	Description	Comments
	415 V	415 Vac	
Group 11 Future Use	Code	Description	Comments
	-	Not applicable	For future use
Group 12 Future Use	Code	Description	Comments
	-	Not applicable	For future use
Group 13 Future Use	Code	Description	Comments
	-	Not applicable	For future use

***For options not listed, please contact CBI***


**TIME DELAY CURVES**

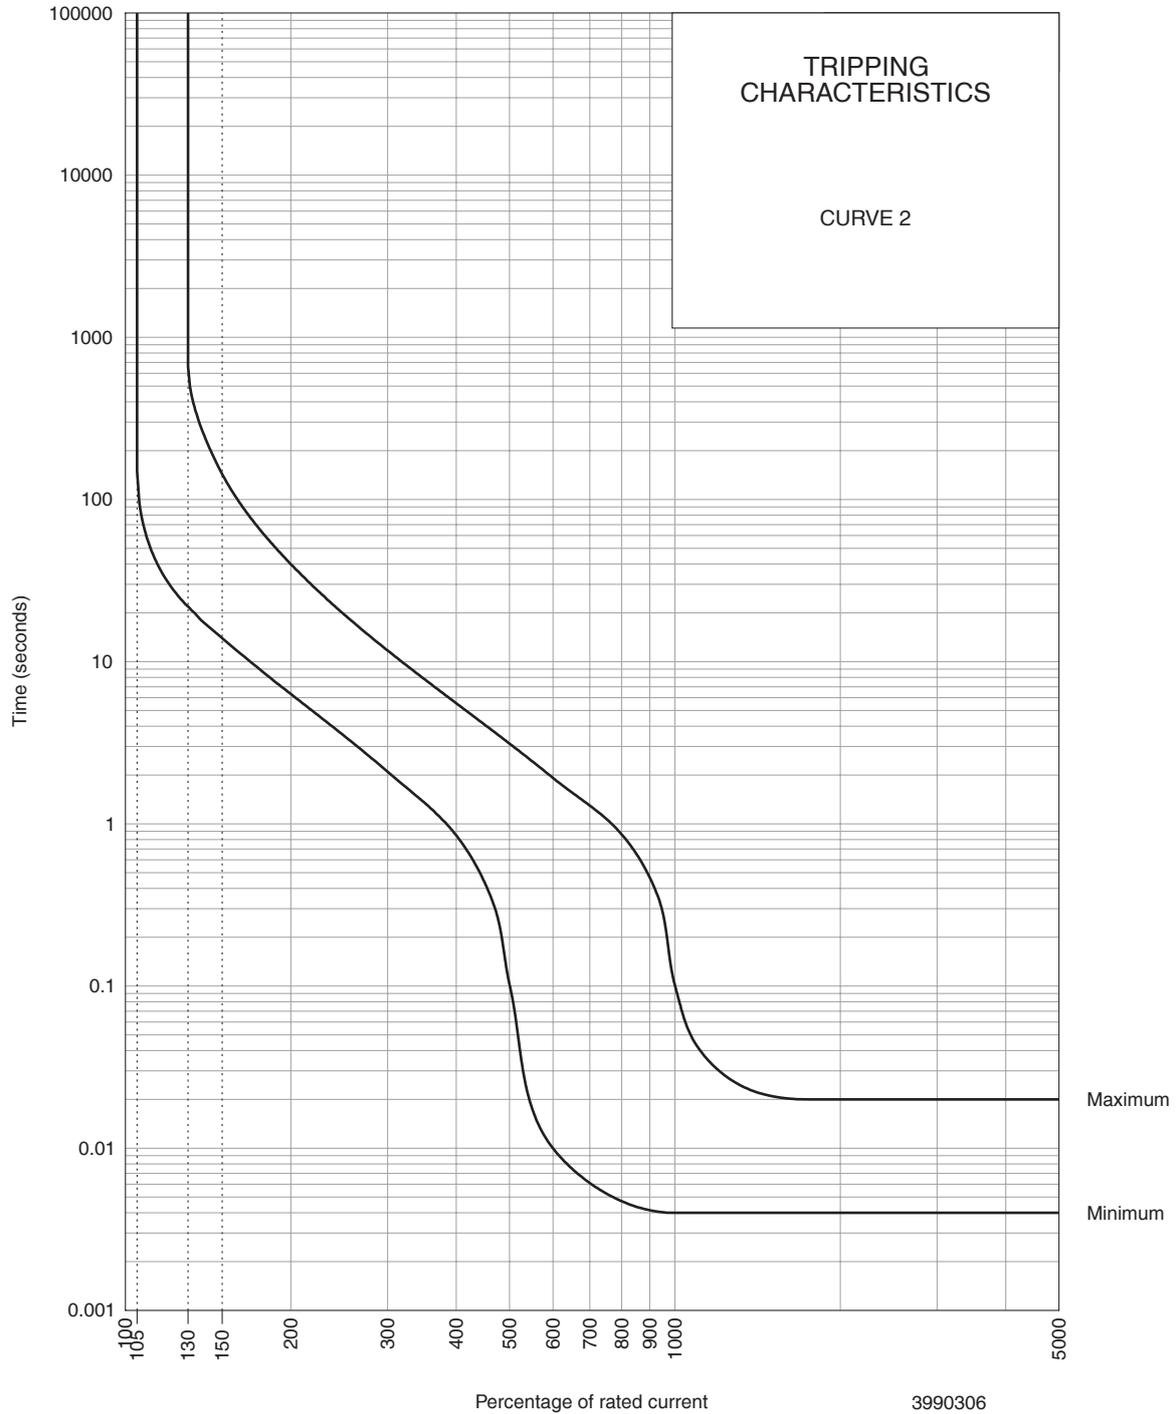

PERCENTAGE OF RATED CURRENT	105%	130%	145%	150%	200%	300%	400%	500%	600%	700%	800%	900%	1000%	2000%
MINIMUM TRIP TIME IN SECONDS	NO TRIP	22	15.4	14	6.3	2.1	0.85	0.1	0.001	0.006	0.005	0.041	0.004	0.004
MAXIMUM TRIP TIME IN SECONDS	NO TRIP	660	180	144	40	12	5.5	3	1.92	1.3	0.86	0.47	0.1	0.02

\* The published time delay curves are generated at 30°C ambient temperature with the Circuit Breaker mounted in the up-right position. The “must hold”, “must trip” and “instantaneous trip” current values are not affected by temperature, although delay time for the other operating current values may have to be adjusted using the temperature compensation curve which is available on request.


**INTERNAL IMPEDANCE VS CURRENT RATING**

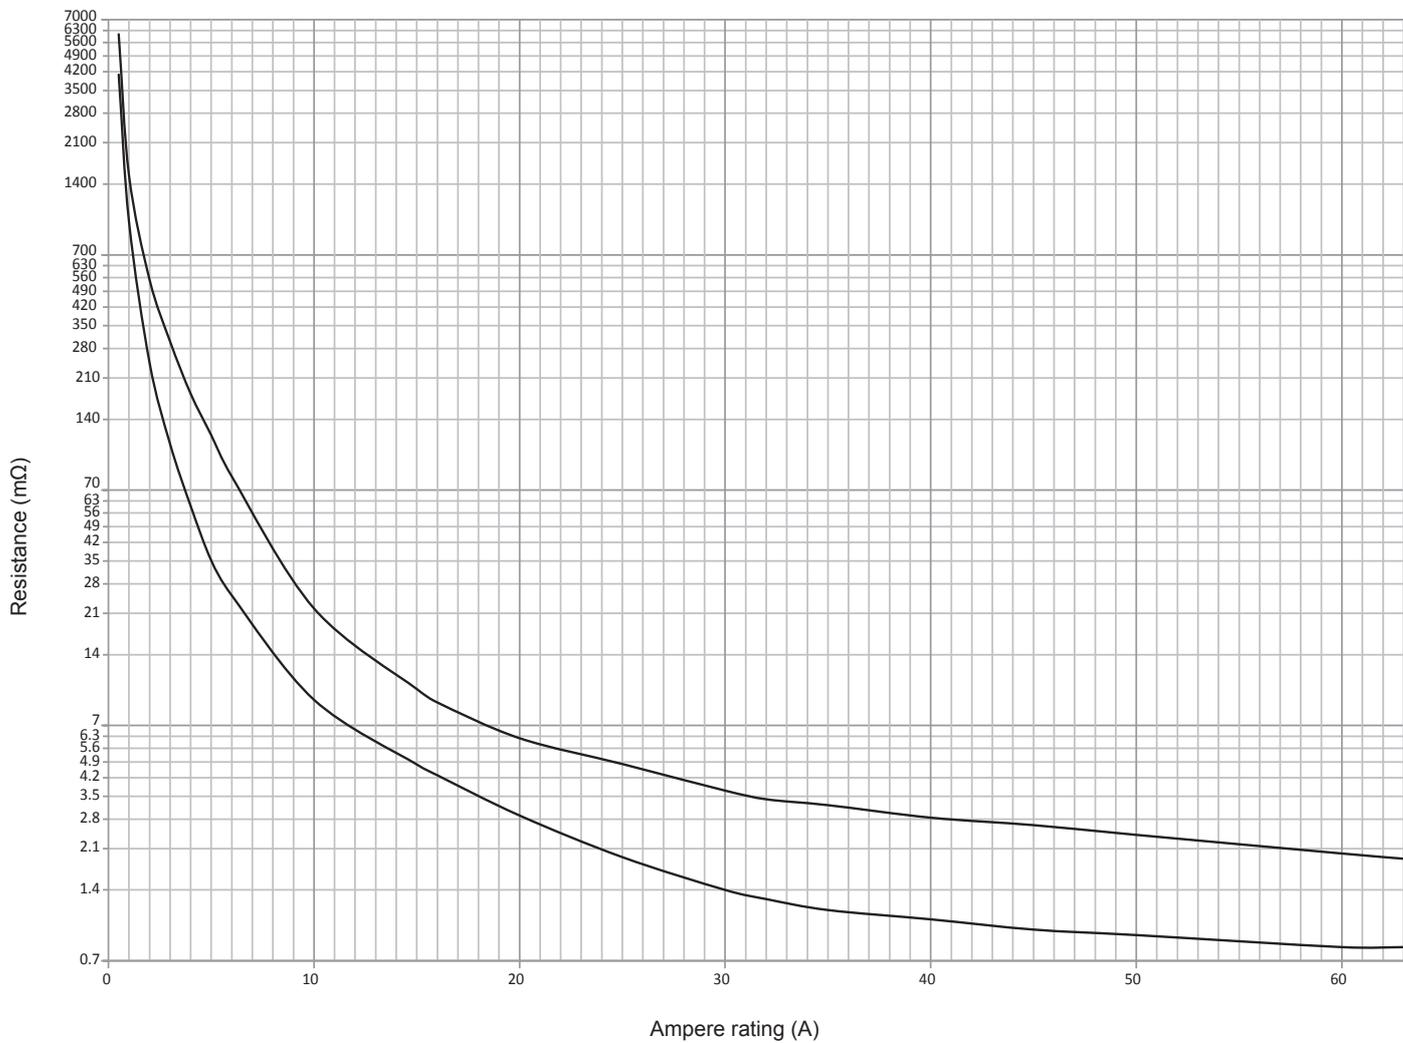

3990A784 REV A

Amp RATING	0.5	1	2	5	6	10	15	20	25	30	32	40	50	60	63
MINIMUM (mΩ)	4085	970	244	35	25	9.0	4.8	2.9	1.9	1.4	1.3	1.1	0.9	0.8	0.8
MAXIMUM (mΩ)	6065	1527	550	120	80	22	10	6.2	4.8	3.7	3.4	2.8	2.4	2.0	1.9

**OUTLINE DIMENSIONS: DUAL (DIN & MINI RAIL) MOUNT**

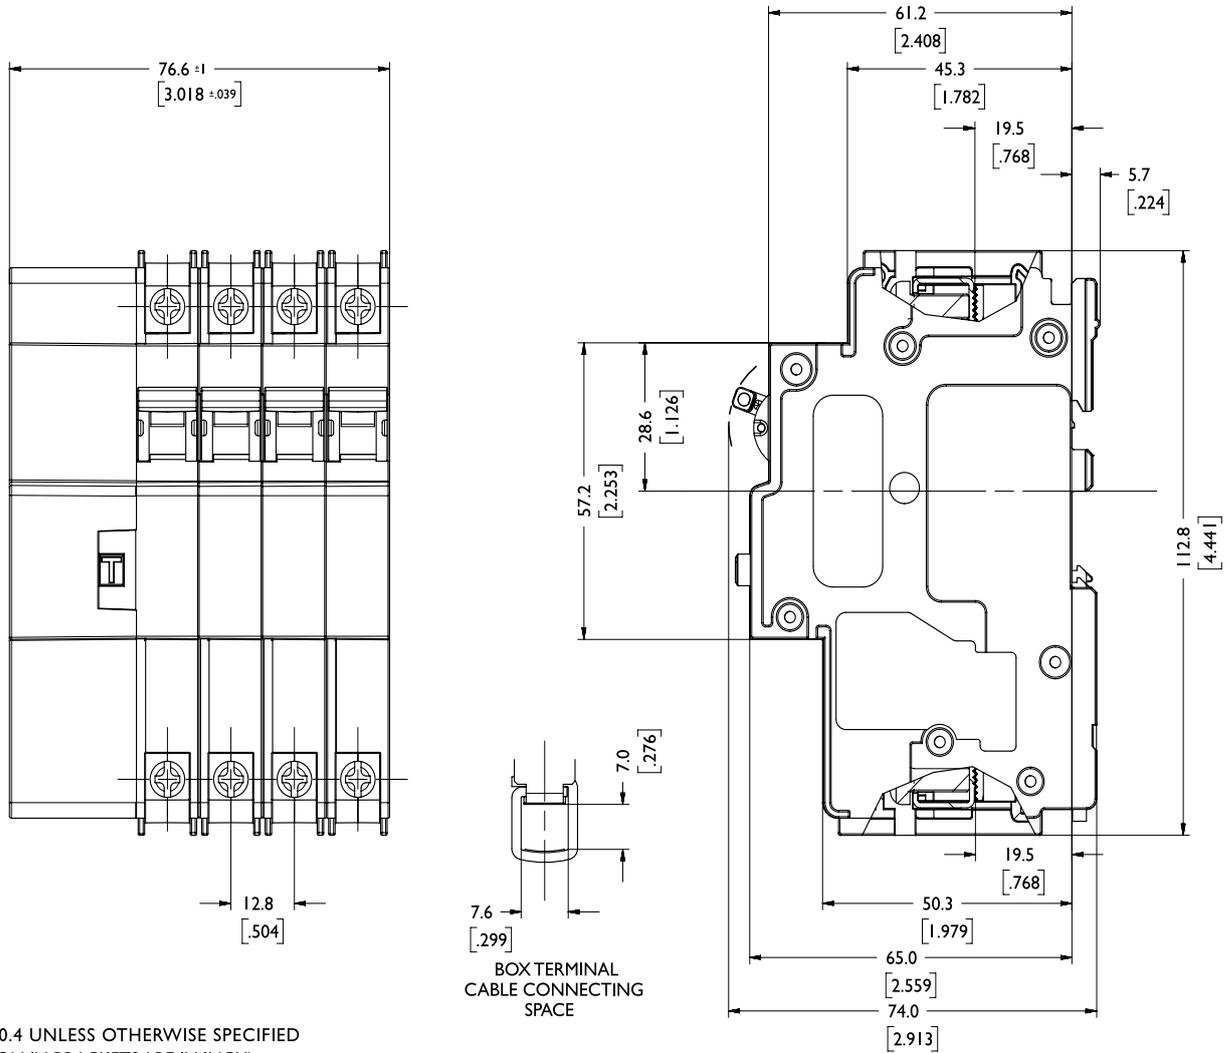

TOLERANCE ±0.4 UNLESS OTHERWISE SPECIFIED  
(DIMENSION IN BRACKETS ARE IN INCH)

Please review our Customer Terms and Conditions on [www.cbi-lowvoltage.co.za](http://www.cbi-lowvoltage.co.za)

All rights reserved. Unless otherwise indicated, all materials on these pages are copyrighted by CBI (Pty) Ltd. No part of these pages, either text or image may be used for any purpose other than personal use. Therefore, reproduction, modification, storage in a retrieval system or retransmission, in any form or by any means, electronic, mechanical or otherwise, for reasons other than personal use, is strictly prohibited without prior written permission. CBI (Pty) Ltd reserves the right to alter any details of this document without notice and while every effort is made to ensure the accuracy of the content, no warranty is given as to accuracy of this document and no responsibility will be accepted for error or misinterpretation and any resulting loss.

**AUSTRALIA**

**CBi-electric: Australia**  
33 Bazalgette Crescent, Dandenong  
South, VIC., 3175, Australia  
Tel: +1800 770 870  
Email: [sales@cbi-electric.com.au](mailto:sales@cbi-electric.com.au)  
Website: [www.cbi-electric.com.au](http://www.cbi-electric.com.au)

**SOUTH AFRICA**

**CBi-electric: low voltage**  
Tripswitch Drive Elandsfontein  
Gauteng South Africa  
Tel: +27 11 928 2000  
Fax: +27 11 392 2354  
Email: [cbi@cbi-electric.com](mailto:cbi@cbi-electric.com)  
[internationalsales@cbi-electric.com](mailto:internationalsales@cbi-electric.com)  
Website: [www.cbi-lowvoltage.com](http://www.cbi-lowvoltage.com)

**USA**

**CBi-electric: North America**  
600 Eagleview Blvd Suite 300  
Exton PA 19341 USA  
Tel: +1 610 524 9949  
Fax: +1 610 524 9945  
E-mail: [info@cbibreakers.com](mailto:info@cbibreakers.com)  
Website: [www.cbibreakers.com](http://www.cbibreakers.com)